



GE APPLIANCES
a Haier company

AIR & WATER SOLUTIONS

SmartSERIES Electric Water Heaters

KEY FEATURES

REAL CAPACITY

Get the most from the only water heater that holds a true capacity of hot water compared to electric steel tank water heaters per DOE rated gallon capacity on tall and short models.

MAXIMUM PERFORMANCE

Live comfortably with this best in class water heater that delivers up to 78 gallons of hot water in the first hour of use measured through DOE First Hour Rating.

BUILT-IN-WIFI

Easily adjust temperatures, set vacation mode schedules, and receive notifications with built-in WiFi powered by SmartHQ.

ANODE ROD

Durable magnesium design offers long-lasting protection against corrosion to extend the life of your water heater tank.

QUICK RECOVERY

Two 5500W heating elements quickly increase hot water.

DRAIN VALVE

Rust-proof brass or glass filled nylon construction can be counted on to provide long-lasting service.

EASY INSTALLATION

Replace your old water heater quickly and easily using standard water and electric connections. Quick electronic connectors are provided with full instructions. T&P relief valve factory installed.

BUILT-TO-LAST-WARRANTY

RealMAX water heaters carry an 10-year or 12-year tank and parts limited warranty.*



Certified to
NSF/ANSI 372
See http://info.nsf.org/CertifiedLead_Content/
for specific model listing



Listed by
Underwriters
Laboratories



Scan here to learn
more about the
full line of water
heater solutions

Visit geappliancesairandwater.com for more details.



SPECIFICATION DETAILS

							Dimensions in Inches Approx.						
							A	B	C	D	E		
Model Number	Nominal Capacity (Gallons)	Rated Storage	First Hour Rating (Gallons)	Uniform Energy Factor Min	Recovery @ 90°F Gallon per Hour	Element Wattage	Floor to top of Tank Height	Floor to T&P Relief Valve	Product Body Diameter/Width	Hot to Cold Water Connections	Floor to top of Inlet/Outlet Connections Height	Product Weight (lbs) est.	Shipping Weight (lbs) est.
Short Models													
GE30S10BLM*	30	30	60	0.92	25	5,500	40-3/8	31-7/8	22	8	41-7/8	101	111
GE40S10BLM*	40	40	65	0.92	25	5,500	51-3/8	42-7/8	22	8	52-7/8	121	133
GE50S10BLM*	50	50	75	0.93	25	5,500	51-1/2	42-5/8	24	8	53	150	161
Tall Models													
GE30T10BLM*	30	30	59	0.92	25	5,500	49-7/8	41-3/4	20	8	51-3/8	104	113
GE40T10BLM*	40	40	66	0.92	25	5,500	64	56	20	8	65-1/2	127	139
GE50T10BLM*	50	50	78	0.93	25	5,500	62-1/4	53-7/8	22	8	63-3/4	142	154



*Change 10 to 12 for 12 year tank and parts warranty.

10-year models feature a glass-filled nylon drain valve.

12-year models feature a brass drain valve

Water connections are 3/4".

Dimensions and specifications are subject to change without notice.

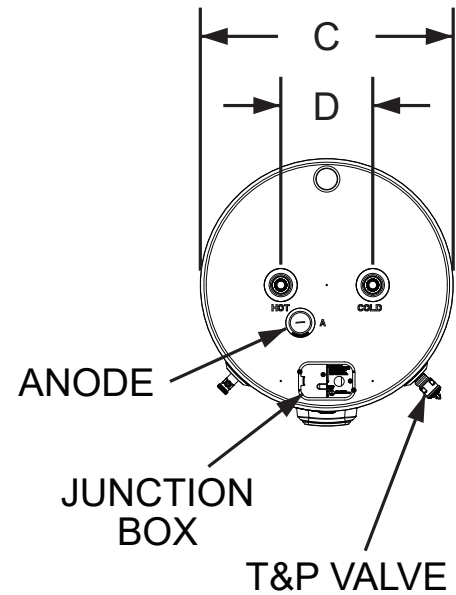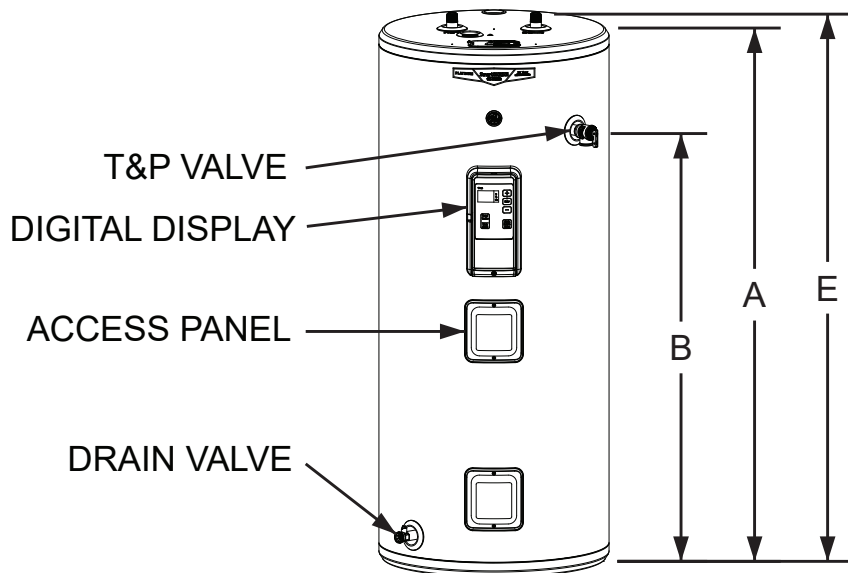

Illustrations are intended for dimensional reference only. Refer to photograph for actual product appearance

LOCAL INSTALLATION REGULATIONS:

This water heater must be installed in accordance with these instructions, local codes, utility codes, utility company requirements or, in the absence of local codes, the latest edition of the National Electrical Code. It is available from some local libraries or can be purchased from the National Fire Preventions Association, Batterymarch park, Quincy, MA 02169 as booklet ANSI/NFPA 70