

Filter Cartridges

There is an overwhelming selection of cartridges to choose from. We offer a range of popular cartridges to cover most water quality needs. Your Professional Water Specialist can help determine the correct filtration products for your needs.

What is a Micron Rating?

A micron rating is also common for most cartridges. One micron is equivalent to 0.000039 inches (the diameter of a human hair is 50 to 70 microns). Choosing the right micron rating is a balance between performance and cartridge life. If you chose a smaller micron rating and the cartridge is loading up too fast then a higher micron rated cartridge may provide a better balance.

P-CB SERIES Carbon Block Filter Cartridges

Aqua Flo P-CB Series Cartridges are suitable for high capacity chlorine, bad taste and odor reduction.

Aqua Flo P-CB Series Cartridges are an ideal choice for a wide range of residential, food service, commercial and industrial applications. They also make excellent polishing filters or pre-filters in applications requiring fine filtration and high capacity.

FEATURES / BENEFITS:

- ◆ Premium high capacity bad taste and odor, and chlorine taste & odor reduction
- ◆ High dirt-holding tolerance
- ◆ High porosity maximizes utilization of the carbon block
- ◆ Available in four sizes: 2.5x10"; 2.5x20"; 4.5x10"; 4.5x20"
- ◆ Universal fit – Fits most standard water filter housings
- ◆ Available in three micron ratings: 0.5; 5; 10


SPECIFICATIONS:

- ◆ End Caps – Polypropylene
- ◆ Gasket – SBC Rubber
- ◆ Filter Media – Acid Washed Activated Carbon (Coconut Shell Based)
- ◆ Netting – Polypropylene
- ◆ Outer Wrap – Polypropylene
- ◆ Temperature Rating – 40 - 125°F (4 - 52°C)

AQUA FLO®
PLATINUM


APPLICATIONS (For water filtration only):

- ◆ Commercial/Residential Drinking Water Filtration
- ◆ Food & Beverage Filtration
- ◆ Industrial Water Filtration
- ◆ Chlorine reduction for process water

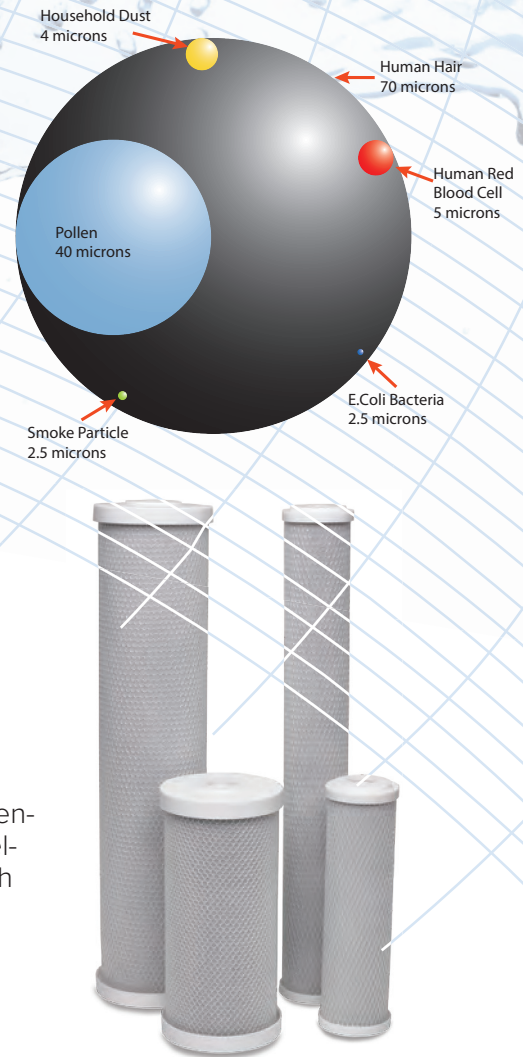

Filter Cartridges

P-CB SERIES Carbon Block Filter Cartridges



SPECIFICATIONS & PERFORMANCE:

ITEM #	DESCRIPTION	DIMENSIONS	CASE QTY	SHIP WEIGHT EACH (LBS)	RATING (NOMINAL)	FLOW RATE (GPM)	CAPACITY
36002	P-CB-0.5-10	2.5" x 10" (63.5 x 254 mm)	20	0.8	0.5	1.0 US GPM (3.8 LPM)	20,000 Gallons (75,700L)
36023	P-CB-5-10	2.5" x 10" (63.5 x 254 mm)	20	0.8	5	1.0 US GPM (3.8 LPM)	17,000 Gallons (64,350L)
36012	P-CB-10-10	2.5" x 10" (63.5 x 254 mm)	20	0.6	10	1.0 US GPM (3.8 LPM)	15,000 Gallons (56,780L)
36005	P-CB-0.5-20	2.5" x 20" (63.5 x 508 mm)	12	1.8	0.5	2.0 US GPM (7.5 LPM)	45,000 Gallons (170,340L)
36027	P-CB-5-20	2.5" x 20" (63.5 x 508 mm)	12	1.4	5	2.0 US GPM (7.5 LPM)	37,000 Gallons (140,060L)
36017	P-CB-10-20	2.5" x 20" (63.5 x 508 mm)	12	1.6	10	2.0 US GPM (7.5 LPM)	35,000 Gallons (132,490L)
36001	P-CB-0.5-10BV	4.5" x 10" (114.3 x 254 mm)	12	3.4	0.5	3.0 US GPM (11.4 LPM)	70,000 Gallons (264,980L)
36025	P-CB-5-10BV	4.5" x 10" (114.3 x 254 mm)	12	2.6	5	3.0 US GPM (11.4 LPM)	60,000 Gallons (227,120L)
36015	P-CB-10-10BV	4.5" x 10" (114.3 x 254 mm)	12	2.4	10	3.0 US GPM (11.4 LPM)	52,000 Gallons (196,840L)
36008	P-CB-0.5-20BV	4.5" x 20" (114.3 x 508 mm)	6	3.8	0.5	6.0 US GPM (22.7 LPM)	150,000 Gallons (567,810L)
36029	P-CB-5-20BV	4.5" x 20" (114.3 x 508 mm)	6	4.6	5	6.0 US GPM (22.7 LPM)	120,000 Gallons (454,250L)
36020	P-CB-10-20BV	4.5" x 20" (114.3 x 508 mm)	6	4.4	10	6.0 US GPM (22.7 LPM)	100,000 Gallons (378,540L)

WARNING: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

NOTE: Initial flow pressure drop less than 5 psi at rated flow rate. Change filter when pressure drop exceeds 10 psi.