



- Available Configurations
- 2-Units

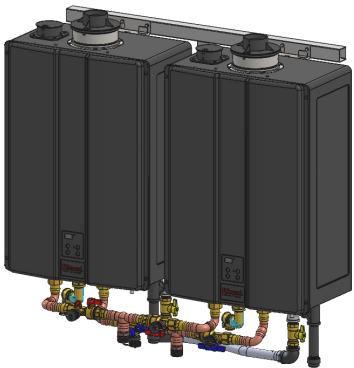

CU Series

2-Unit Compact Wall-Mount Frame

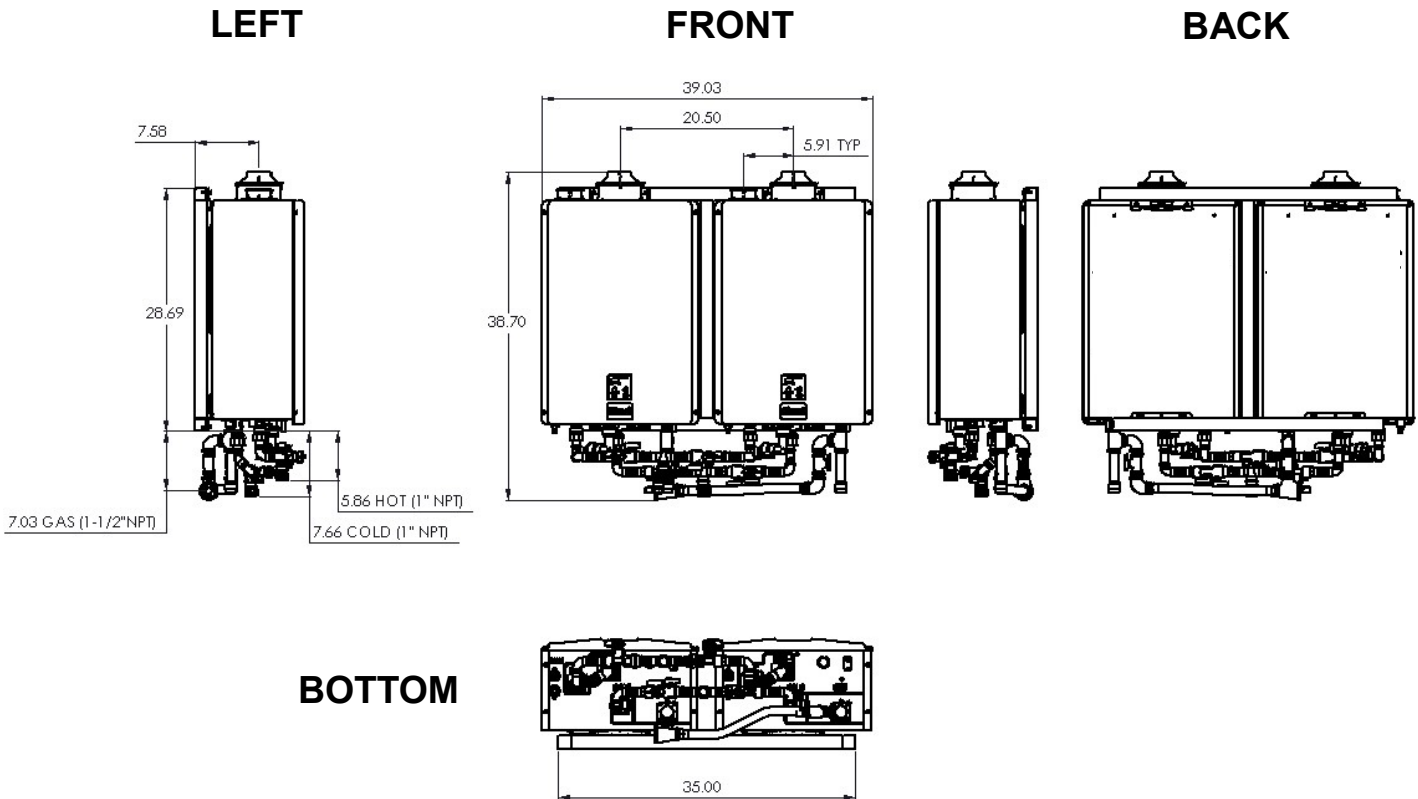

| Model   | Configuration | Illustration |
|---------|---------------|--------------|
| TRX02CU |               |              |

*CU Series 2-Unit Compact Wall-Mount Frame (Continued)*

| Model                                        | TRX02CUi                                      | TRX02CUe                                     |
|----------------------------------------------|-----------------------------------------------|----------------------------------------------|
| Water Heater Model                           | CU199iN (1)                                   | CU199eN (1)                                  |
| Crate Dimensions (HxLxD) - in                | 46 x 42 x 48                                  |                                              |
| Weight - Fully Assembled - lbs               | 160                                           | 160                                          |
| Weight - Shipping (3 components) - lbs       | 540                                           | 540                                          |
| Rack Frame - Specifications                  |                                               |                                              |
| Frame Material                               | 14 Gauge Hot Rolled Steel 1.5 in. Square Tube | 16 Gauge Stainless Steel 1.5 in. Square Tube |
| Frame Finish                                 | Powder Coat                                   | Stainless                                    |
| Color                                        | Gray                                          | Stainless                                    |
| Water & Gas Connections                      |                                               |                                              |
| Hot Water Trunk Line Diameter                | 1 in.                                         |                                              |
| Cold Water Trunk Line Diameter               | 1 in.                                         |                                              |
| Hot Water Trunk Line Material                | Rigid Copper                                  |                                              |
| Cold Water Trunk Line Material               | Rigid Copper                                  |                                              |
| Water Trunk Connection Type                  | 1 in. MNPT                                    |                                              |
| Gas Trunk Line Diameter                      | 1-1/2 in.                                     |                                              |
| Gas Trunk Connection Type                    | 1-1/2 in. MNPT                                |                                              |
| Gas Trunk Line Material                      | Schedule 40 Steel                             |                                              |
| Gas Branch Line Material                     | PVC Over CSST                                 |                                              |
| Electric Requirements                        |                                               |                                              |
| Voltage                                      | AC 120 Volts - 60 Hz                          |                                              |
| Maximum Current (Amperes)                    | 8                                             |                                              |
| BTU and Flow Rates for C199i, CU199e (NG/LP) |                                               |                                              |
| Number of Tankless Water Heaters             | 2                                             |                                              |
| Flow rate @ 70°F rise (gpm)                  | 10.8                                          |                                              |
| Flow rate @ 100°F rise (gpm)                 | 7.6                                           |                                              |
| Minimum input rate (Btuh)                    | 15,200                                        |                                              |
| Maximum input rate (Btuh)                    | 398,000                                       |                                              |
| Accessories                                  |                                               |                                              |
| Propane Conversion Kit                       | Included                                      |                                              |
| Cascade Controls - REU-EZC-2                 | Pre-installed                                 |                                              |
| Offset Wall Bracket                          | Optional Accessory                            |                                              |
| Free Standing Leg Kit                        | Optional Accessory                            |                                              |

(1) Refer to the included conversion kit and instructions for converting to LP.

**TRX02CU**

