

wilo®



wilo®

Star S 21 ZFX



Date:

Tag #	Model #	Check Valve	Speed	Flow	Head	Phase	Voltage
	Star S 21 ZFX	n/a				1	115v

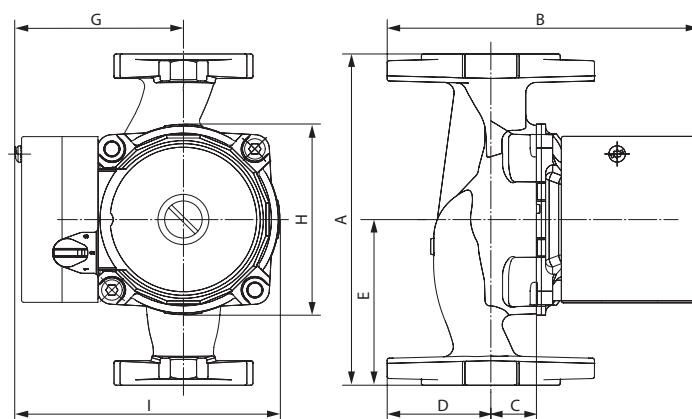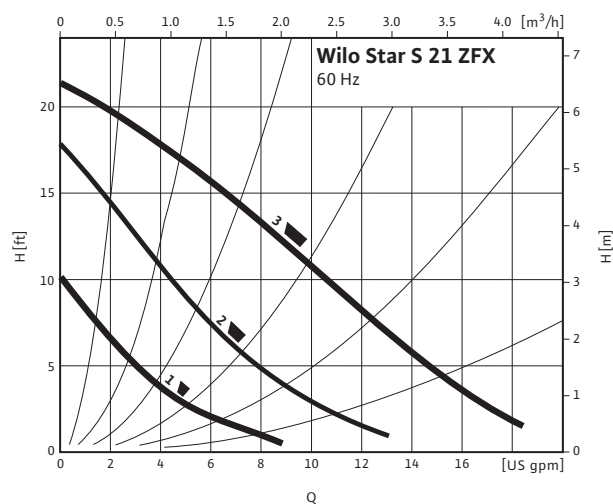

Applications

- Domestic Hot Water
- Heating & Cooling
- Solar Systems
- Air-Conditioning
- Water/Glycol up to 50%
- Geothermal Systems

Materials of Construction

Impeller	Engineered Composite (40% GF)
Shaft	Stainless Steel AISI 420SS
Bearing	Metal Impregnated Carbon
Volute	Stainless Steel
Pump Housing	Stainless Steel AISI 316L

Technical Data

Max. Temp. Range	-14°F to 230°F (-10°C to 110°C)
Ambient Temp.	104°F (40°C)
Electrical Connections	1~115
Max. Working Pressure	140 PSI (10 Bar)
Min. Inlet Pressure 122°F (50°C)	0.7 PSI (0.05 Bar)
Min. Inlet Pressure (203°F)	4.4 PSI (0.3 Bar)
Min. Inlet Pressure (230°F)	14.5 PSI (1 Bar)

Dimensions and Weights

Dimensions – Inches (mm)									Weight lbs (kg)
Model	A	B	C	D	E	G	H	I	
Star S 21 ZFX	6 ³ / ₈	6 ³ / ₈	7 ⁷ / ₈	2	3 ³ / ₁₆	3 ³ / ₁₆	3 ¹¹ / ₁₆	5 ¹ / ₁₆	6.5
	(162)	(154)	(22)	(50)	(81)	(81)	(93.5)	(128)	(3.0)

Motor Data

		Speed	Watts	FLA
Model	hp	RPM	W	A
Star S 21 ZFX	1/25	1300-2700	60-110	0.52-0.96

Approval Stamp

Tel: +52 55 5586 3209 Web: www.wilo-mexico.com.mx
Fax: +52 1 55 5413 4165 Email: info@wilo.com.mx